



Maximal Forklift (Zhejiang) Co., Ltd

Address No.1, jinxin Road, Lushan Industrial area, Fuyang, Zhejiang China

Tel 0086-571-28001566
0086-571-28935028
0086-571-28979902

Fax 0086-571-28001569

Email

For sales
info@maxforklift.com
For spare parts
parts@maxforklift.com

All rights reserved.

If any doubt, please contact us.



CE CERTIFICATE ISO 14001:2004 ISO 9001:2000

Electric Forklift

M series 3-wheel forklift 1.6-2t



Electric Forklift

www.maxforklift.com


maximal


M SERIES 1.6-2.0t 3-wheel electric forklift **Lead acid / Lithium battery**

Specification	1	Model	FB16S-MJZ	FB18S-MJZ	FB20S-MJZ		
	2	Rated capacity	kg	1600	1800	2000	
3	Load centre	mm	500	500	500		
4	Lifting height	mm	3000	3000	3000		
5	Free lifting height	mm	0	0	0		
6	Fork size	T×W×L	mm	35×100×920	35×100×920		
7	Tilting angle	F/R (α°/β°)	Deg	6,5°/6,5°	6,5°/6,5°		
Dimensions	8	Overall Dimension	Length (to forklift)	1979	1979	2094	
	9		Width	1070	1070	1140	
	10		Height when mast lowered	1975	1975	1975	
	11		Height when mast extended	4010	4010	4010	
	12		Height to safeguard	1971	1971	2011	
	13	Turning radius	Min.	1643	1643	1758	
	14	Front overhang	mm	371	371	371	
	15	Tread	F/R	mm	924/186	924/186	942/186
	16	Ground clearance	Min.	mm	90	90	90
	17	Wheelbase	mm	1400	1400	1515	
18	Fork spread	Min./Max.	mm	200/890	200/890	200/890	
19	Working aisle width with pallet(Ast)*	1000×1200 crossways	mm	3340	3340	3445	
20		800×1200 lengthways	mm	3464	3464	3579	
Performance	21	Speed	Travel(Laden)	km/h	13	13	13
	22		Travel(Unladen)	km/h	13	13	13
	23		Lifting(Laden)	mm/s	290	280	255
	24	Lifting(Unladen)	mm/s	445	435	435	
	25	Gradeability	Laden	%	15	15	15
	26		Unladen	%	15	15	15
27	Service weight	Include battery box	kg	3080	3140	3430	
28	Tyre	Front×2		18×7-8	18×7-8	200/50-10	
29		Rear×2		15×4 ^{1/2} -8	15×4 ^{1/2} -8	15×4 ^{1/2} -8	
Drive	30	Motor	Driven motor	kw	4×2	4×2	4×2
	31		Pump motor	kw	9.2	11	11
	32	Battery	Lead acid battery	V/Ah	48/500	48/500	48/620
	33		Lithium battery	V/Ah	48/450	48/450	48/450
	34	Controller	Type		AC	AC	AC
35	Manufacturer			ZAPI	ZAPI	ZAPI	
36	Operating pressure for attachment	Mpa	14.5	14.5	17.5		


M SERIES 1.6-2.0t 3-wheel electric forklift mast

Type	Model	Max. fork height	Overall height			Free lift		Front Overhang	Tilting range		Capacity		
			Lowered	Extended		Without backrest	with backrest		FWD	BWD	load capacity at 500mm		
				Without backrest	With backrest						Single tyre		
		mm	mm	mm	mm	mm	mm	Deg	Deg	1.6t	1.8t	2.0t	
2-stage mast	BM250	2500	1725	3010	3480	0	0	376	6.5	6.5	1600	1800	2000
	BM270	2700	1825	3210	3680	0	0	376	6.5	6.5	1600	1800	2000
	BM300	3000	1975	3490	4010	0	0	376	6.5	6.5	1600	1800	2000
	BM330	3300	2125	3790	4310	0	0	376	6.5	6.5	1600	1800	2000
	BM350	3500	2225	3990	4510	0	0	376	6.5	6.5	1600	1800	2000
	BM370	3700	2325	4190	4710	0	0	376	6.5	6.5	1600	1800	2000
	BM400	4000	2525	4490	5010	0	0	376	3.5	5	1600	1800	2000
	BM425	4250	2650	4760	5280	0	0	376	3.5	5	1500	1700	1900
	BM450	4500	2775	4990	5510	0	0	376	3.5	5	1400	1600	1800
	BM550	5500	3325	5990	6510	0	0	376	3.5	5	1150	1200	1300
full free 2-stage mast	BFM250	2500	1725	3010	3465	1200	760	376	6.5	6.5	1600	1800	2000
	BFM270	2700	1825	3210	3665	1300	860	376	6.5	6.5	1600	1800	2000
	BFM300	3000	1975	3490	4010	1450	1010	376	6.5	6.5	1600	1800	2000
	BFM330	3300	2125	3790	4310	1600	1160	376	6.5	6.5	1600	1800	2000
	BFM350	3500	2225	3990	4510	1700	1260	376	6.5	6.5	1600	1800	2000
	BFM370	3700	2325	4190	4710	1800	1360	376	6.5	6.5	1600	1800	2000
Full free 3-stage mast	BFM400	4000	2525	4490	5010	2000	1560	376	3.5	5	1600	1800	2000
	BTFM435	4350	1975	4860	5360	1425	995	376	3.5	5	1500	1700	1900
	BTFM450	4500	2025	4990	5510	1475	1045	376	3.5	5	1400	1600	1800
	BTFM480	4800	2125	5290	5810	1575	1145	376	3.5	5	1300	1500	1650
	BTFM500	5000	2225	5490	6010	1675	1245	376	3.5	5	1250	1450	1500
	BTFM550	5500	2390	5990	6510	1840	1410	376	3.5	5	1150	1200	1300
BTFM600	6000	2575	6490	7010	2025	1595	376	3.5	5	1050	1100	1200	
BTFM650	6500	2790	6990	7510	2205	1775	376	3.5	5	900	950	1000	

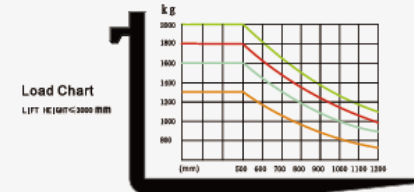

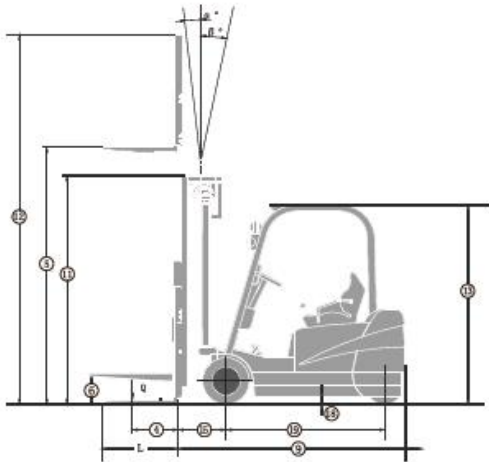

a=200 mm safety clearance
 $AST = a + \textcircled{14} + \textcircled{15} + \sqrt{W^2 + (B/2)^2}$

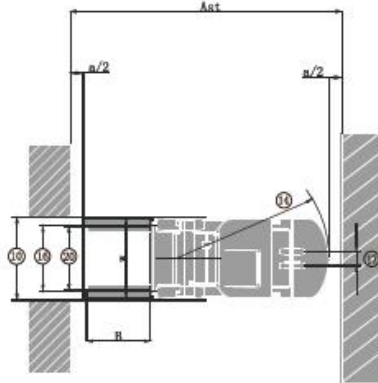

**3-WHEEL
 FORKLIFT
 1.6-2T**

M SERIES

